


Technical Specification



ROBI

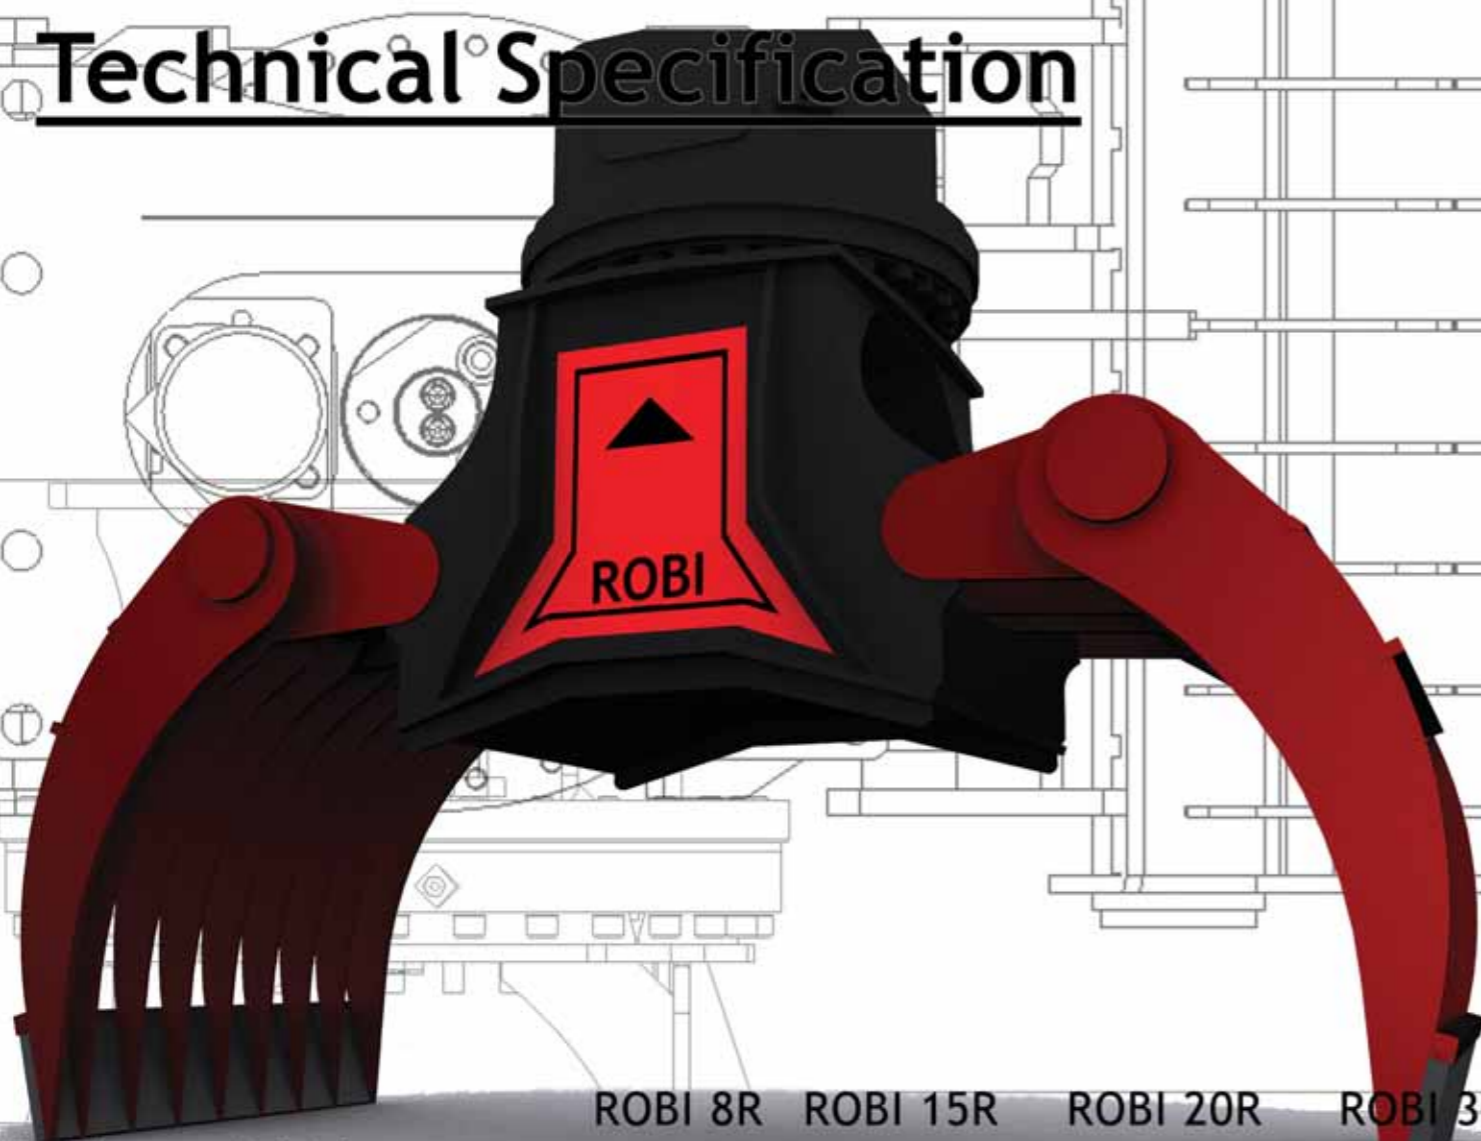

	ROBI 8R	ROBI 15R	ROBI 20R	ROBI 30R
Working weight kg:	420	800	1200	2100
Max. opening mm:	1425	1830	2060	2440
Width of shells mm:	550	800	1000	1250
Excavator class t:	4-9	8 - 16	16 - 24	24 - 40
Max pressure, cylinder bar:	320	350	350	350
Max oil flow, cylinder l/min:	50	80	80	80
Max pressure, rotation bar:	100	100	100	100
Max oil flow, rotation l/min:	30	30	30	30

Also available without rotation!



Transmin Pty Ltd
35 Denninup Way
Malaga WA 6090
Phone: 08 9270 8555
Fax: 08 9209 3922
www.transmin.com.au



Renex Equipment
161 Francis Road
Wingfield SA 5013
Phone: 08 8347 1110
Fax: 08 8345 4765
www.renfreyplanthire.com.au



GroundTec Equipment
2 Madeline Street
Strathfield South NSW 2136
Phone: 02 9642 2030
Fax: 02 9642 0879
www.groundtec.com.au



Walkers Hammers (VIC)
Factory 3
4-6 Somerleigh Road
Laverton North VIC 3026
Phone: 03 9315 3788
Fax: 03 9315 3799
www.walkershammers.com.au



Digga Holdings NZ Ltd
6A Joval Place
Manukau City
New Zealand
Phone: 09 262 3500
Fax: 09 262 350
www.digga.co.nz



Sandvik Mining and
Construction
Australia Pty Ltd
60-62 Qantas Drive
Brisbane Airport QLD 4007
Phone: 07 3637 7400
Fax: 07 3637 7511
www.sandvik.com

ROBBI

Replaceable, wear-resistant blades

Sturdy design of jaws

Robust support of wear plates

Easy maintenance

Separated rotation, bulkhead union and slew bearing

Replaceable bearings

Hose burst valve and end brakes integrated to the cylinder

Big opening and width of shells

Replaceable wear plates in the frame

