

RAMMER R16P

PROVEN
TECHNOLOGY



PERFORMANCE LINE

NITROGEN PISTON
ACCUMULATOR

IDLE BLOW PROTECTION
(FIELD ADJUSTABLE ON/OFF)

PRESSURE DAMPENING
MEMBRANE ACCUMULATOR

RAMLUBE II
GREASING SYSTEM




UNBEATABLE PERFORMANCE


The new Rammer Performance Line hammers are your everyday solution for a wide range of breaking demands. Designed with proven Rammer features and standards, these Rammer Performance Line hammers offer more than just excellent power-to-weight ratio, they bring the quality reassurance that only a true Rammer hammer can bring.

Read more about the product from www.rammer.com

**Ram
mer®**

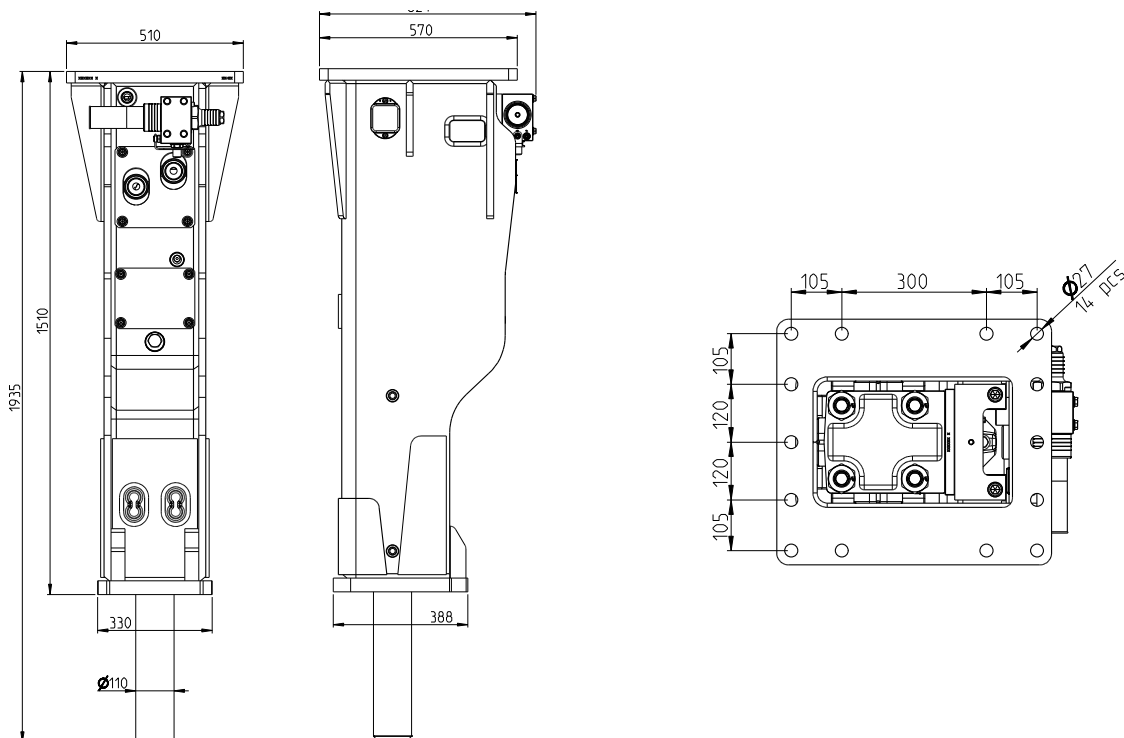

ACCESSORIES



Ramlube II

Lubrication system for optimum wear and impact protection.



Ramdata II

Gives information about service interval status, service history and accumulated working history.

Minimum working weight, kg (lb)	1 120 (2 470)
Tool diameter, mm (in)	110 (4.33)
Oil flow range, l/min (gal/min)	90 - 120 (23 - 31)
Impact rate, bpm	280 - 860
Operating pressure, bar (psi)	160 - 180 (2320 - 2610)
Pressure relief, min, bar (psi)	200 (2 901)
Pressure relief, max, bar (psi)	220 (3 191)
Back pressure, max, bar (psi)	10 (145)
Back pressure, max bar	10
Input power, kW (hp)	36 (48)
Miniexcavator range, ton (lb)	13 - 21 (28 700 - 46 300)
Skid steer range, ton (lb)	N/A
Noise level measured sound power level, LWA, dB(A)	119
Noise level guaranteed sound power level, LWA, dB(A)	123

TOOLS



Moil point tool



Chisel tool



Blunt tool



Pyramid tool



Hydraulic Attachment Specialist

03 9315 3788
sales@walkershammers.com.au
3, 4-6 Somerleigh Rd
Laverton North VIC 3026

walkershammers.com.au

RAMMER HITS HARDER / rammer@sandvik.com / www.rammer.com

