FACTORY INSTALLED RD3 FOR MYFLEET

RAMVALVE

RAMLUBE II (OPT.)

MEMBRANE TYPE **ACCUMULATOR**

DOUBLE TOOL RETAINING PIN STRUCTURE

FBE (FIXED BLOW ENERGY)

UPGRADED GREASING FOR TOOL BUSHINGS

VIDAT TIE RODS

EASY IBP ADJUSTMENT

HARD WEAR PLATES

SIMPLE LOWER TOOL **BUSHING ROTATING OR** REPLACEMENT

ACCUMULATOR FILLING POINT ON SIDE

STROKE SELECTOR


EXCELLENCE LINE HITS SMARTER


RAMMER


The Rammer Excellence Line is a set of stateof-the-art hydraulic hammers for all your rock breaking needs. All Excellence Line hammers now have integrated smart technology for easier fleet management and more efficient processes.

Read more about the product from www.rammer.com/excellence



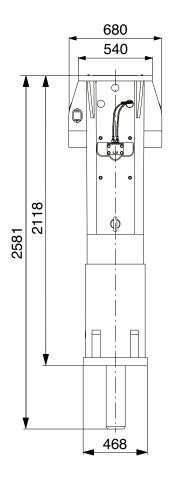

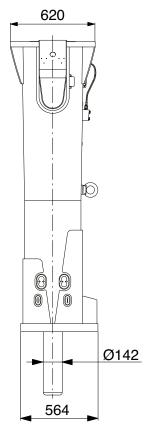



SPECIFICATIONS

Minimum working weight, kg (lb)	2400-2500 (5290-5510)
Impact rate, Long Stroke, bpm	370-630
Impact rate, Short Stroke, bpm	460-740
Operating pressure	150-160 (2175-2320)
Pressure relief, min bar (psi)	220 (3190)
Pressure relief, max bar (psi)	240 (3480)
Oil flow range, I/min (gal/min)	160-250 (42.3-66.0)
Back pressure, max bar (psi)	10 (145)
Input power, kW (hp)	67 (90)
Tool diameter, mm (in)	142 (5.59)
Carrier weight, allowed range, t (lb)	26-42 (57300-88200)
Noise level, measured sound power level, LWA, dB	124
Noise level, guaranteed sound power level, LWA, dB	128

TOOLS

Chisel Pyramid
Hard rock chisel Blunt
Limestone chisel Super blunt
Moil point

PARTS

Service kit 1 Special tool grease Service kit 2 Meissel paste



Hydraulic Attachment Specialist

03 9315 3788

sales@walkershammers.com.au

3, 4-6 Somerleigh Rd Laverton North VIC 3026

